


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 3 TOWNSHIP 14 RANGE 5  
DATE: 6-29-04 1-11-07  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison FD  
METHOD OF ESTABLISHMENT: County: 4-26-00

IN. S.P.C. E ZONE, NAD 83  
NAME: 14050302  
N: 493906.7889(m)  
E: 74741.8291(m)

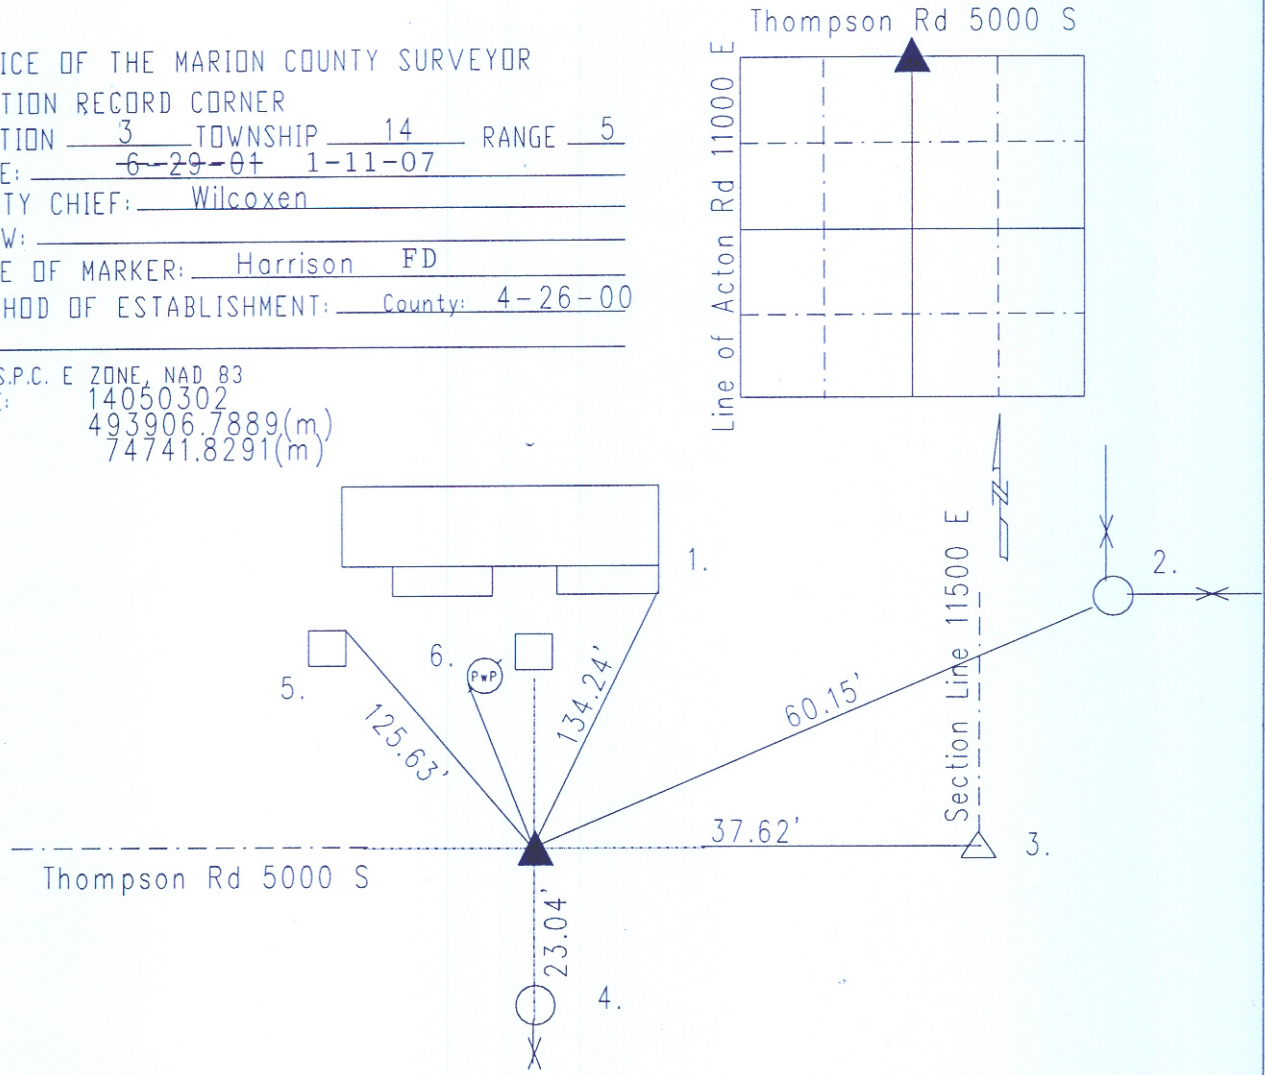

Original post set 1820 by John Hendricks with witnesses: 24" beech N 87 E 41 links, 8" dogwood N 73 W 34 links per Marion County Atlas pg. 13. Survey by Wm. P. Smith 7-30-1871 indicates no stone nor witness per Franklin Township Legal Survey Book pg. 29. MCSO 1950's called an iron pin. GWS-6-13-62 called a railroad spike. GWS 7-18-63 called the same. McLand 5-11-72 called the same. Fortner 11-12-74 called a PK nail. Jacobs 8-1-87 called a PK nail. Whiteside 1-6-94 called PK nail. Wilcoxon 9-7-95 called a railroad spike. Wilcoxon 4-26-00 called a railroad spike. Excavated 6-18-01 by Wilcoxon and a railroad spike was found 4" down. Harrison set. No other points were found during excavation.

14050302

REF.	DISTANCE	DESCRIPTION
1.	134.24'	SE corner of garage ADDRESS 11500
2.	60.15'	PK nail N corner fence post 18"up
3.	37.62'	Due E to S Q 34-15-5 (Harrison)
4.	23.04'	Due S to face of concrete corner fence post
5.	125.63'	NE corner of brick column
6.	16.06'	PK nail W PwP#11480 12"up